

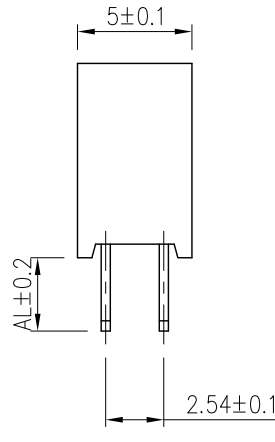
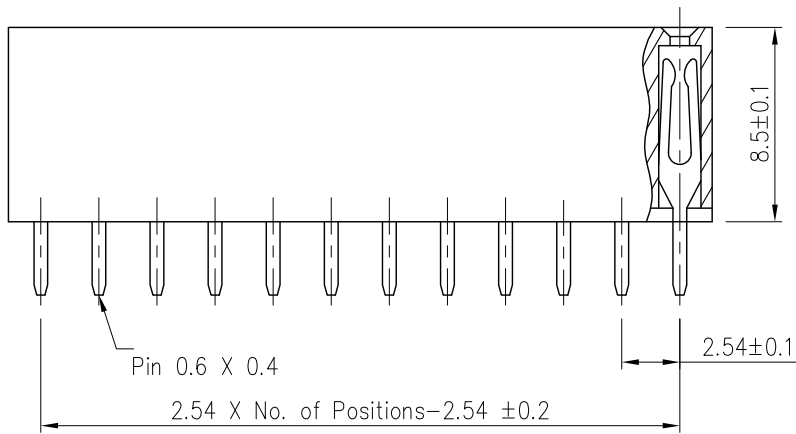


Specifications

Current Rating : 3 Amps  
 Insulator Resistance : 1000 Megohms min.  
 Contact Resistance : 20 m ohms max.  
 Dielectric Withstanding : AC 600V  
 Operating Temperature : -40°C ~ +105°C  
 Contact Material : Brass  
 Insulator Material : Polyester, UL 94V-0  
 Standard :  
 Contact Plated : Full Gold, Full Tin, Selective Plated

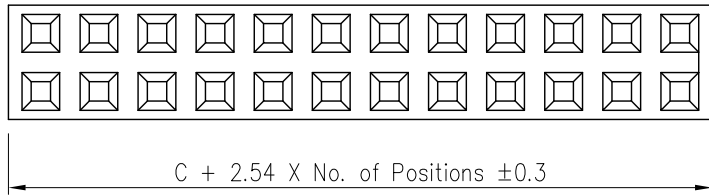


Straight

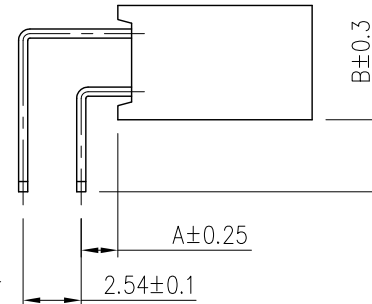


Right Angle

Order Information

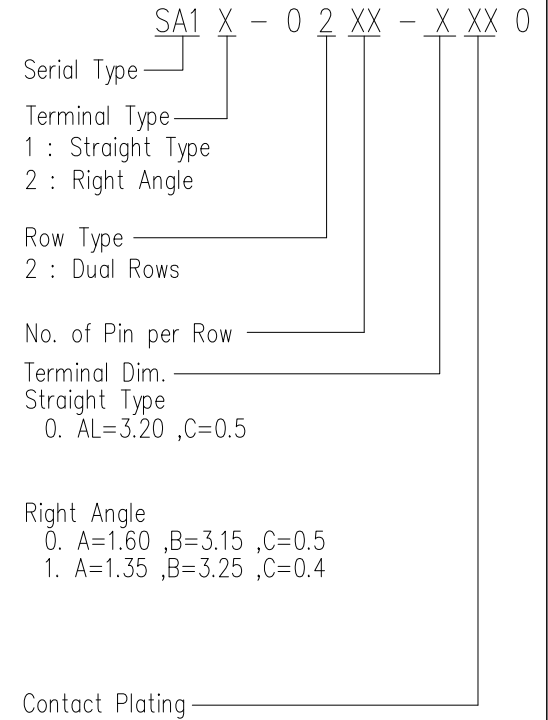





Right Angle  
 0. A=1.60 ,B=3.15 ,C=0.5  
 1. A=1.35 ,B=3.25 ,C=0.4

Recommended  
P.C. Board  
Hole Layout



Contact Plating Type		
Full Gold Plating	Duplex Plating Gold Plated On Contact Area Tin Plated On Solder Area	Full Tin Plating
GF : Gold Flash G1 : Gold 3u" G2 : Gold 5u" G3 : Gold 10u" G4 : Gold 15u"	HF : Gold Flash, Tin 100u" H1 : Gold 3u", Tin 100u" H2 : Gold 5u", Tin 100u" H3 : Gold 10u", Tin 100u" H4 : Gold 15u", Tin 100u"	T1 : Tin 100u"

				TOLERANCE UNLESS SPECIFIED	
				LINEAR	ANGLE
				.X ± 0.25	X' ± 5'
				.XX ± 0.15	.X' ± 2'
				.XXX ± 0.05	.XX' ± 1'
			日期	2005.11.18	
			審核		
更改 REV.	設 變 內 容 MODIFICATION	修改 DRAWN	核准 APPROVED	製 圖	SAM

 朝富科技股份有限公司 JOIN TEK CORPORATION CO., LTD.		
 SCALE	 SHEET	 VER.
名稱 : Female Header P2.54 TITLE Profile : 8.5mm, Dual Rows		
料號 : SA1X-02XX-XXX0 PART NO.		