


Specifications

Current Rating : 3 Amps
 Insulator Resistance : 1000 Megohms min.
 Contact Resistance : 20 m ohms max.
 Dielectric Withstanding : AC 600V
 Operating Temperature : -40°C ~ +105°C
 Contact Material : Brass
 Insulator Material : Polyester, UL 94V-0
 Standard :
 Contact Plated : Full Gold, Full Tin, Selective Plated

Order Information

Serial Type SA1 3 - 0 2 XX - X XX E
 Terminal Type 3 : SMT Type
 Row Type 2 : Dual Row
 No. of Pin per Row
 Terminal Dim. Straight Type
 0. AL=1.00 , C=7.40 , D=5.00
 1. AL=.... , C=.... , D=....
 Contact Plating
 Packing List


- A. In Tube
- B. W/Cap In Tube
- C. W/Flim In Tube
- D. W/Cap In Tape & Reel
- E. W/Flim In Tape & Reel

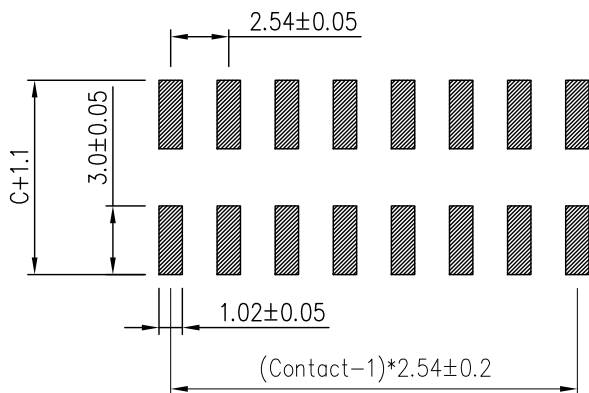

Recommended P.C.B Layout

Contact Plating Type		
Full Gold Plating	Duplex Plating Gold Plated On Contact Area Tin Plated On Solder Area	Full Tin Plating
GF : Gold Flash	HF : Gold Flash, Tin 100u"	T1 : Tin 100u"
G1 : Gold 3u"	H1 : Gold 3u", Tin 100u"	
G2 : Gold 5u"	H2 : Gold 5u", Tin 100u"	
G3 : Gold 10u"	H3 : Gold 10u", Tin 100u"	
G4 : Gold 15u"	H4 : Gold 15u", Tin 100u"	

		TOLERANCE UNLESS SPECIFIED	
		LINEAR	ANGLE
		.X ± 0.25	X' ± 5'
		.XX ± 0.15	.X' ± 2'
		.XXX ± 0.05	.XX' ± 1'
日期		2016.05.25	
審核			
更改 REV.	設 變 內 容 MODIFICATION	修改 DRAWN	核准 APPROVED
		製 圖	SAM

 朝富科技股份有限公司
 JOIN TEK CORPORATION CO., LTD.

SCALE	SHEET	VER.
	1/1	X1

名稱 : Female Header P2.54
 TITLE Profile : 8.5mm, Dual Rows SMT

料號 : SA13-02XX-XXXX
 PART NO.