

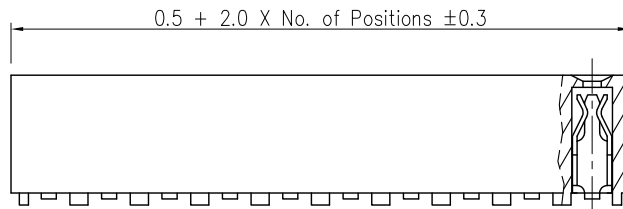


Specifications


Current Rating : 2 Amps
 Insulator Resistance : 1000 Megohms min.
 Contact Resistance : 20 m ohms max.
 Dielectric Withstanding : AC 500V
 Operating Temperature : -40°C ~ +105°C
 Contact Material : Phosphor Bronze
 Insulator Material : Polyester, UL 94V-0
 Standard : P.B.T
 Contact Plated : Full Gold, Full Tin, Selective Plated

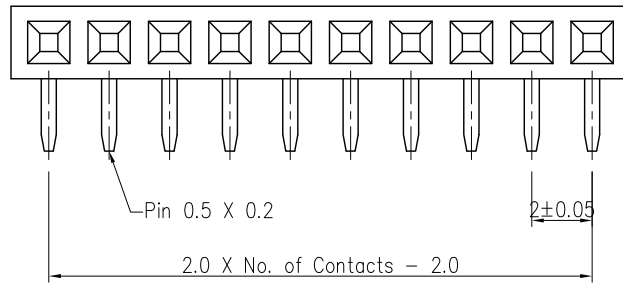


Order Information

Serial No. SB6 2- 0 1 XX - 0 XX 0
 Terminal Type 2 : Right Angle Type
 Row Type 1 : Single Row
 No. of Contact per Row
 Contact Plated

Recommended
 P.C. Board
 Hole Layout



Contact Plating Type		
Full Gold Plating	Duplex Plating Gold Plated On Contact Area Tin Plated On Solder Area	Full Tin Plating
GF : Gold Flash G1 : Gold 3u" G2 : Gold 5u" G3 : Gold 10u" G4 : Gold 15u"	HF : Gold Flash, Tin 100u" H1 : Gold 3u", Tin 100u" H2 : Gold 5u", Tin 100u" H3 : Gold 10u", Tin 100u" H4 : Gold 15u", Tin 100u"	T1 : Tin 100u"

				TOLERANCE UNLESS SPECIFIED		 朝富科技股份有限公司 JOIN TEK CORPORATION CO., LTD.					
				LINEAR	ANGLE				SCALE SHEET VER. 1/1 A		
				.X ± 0.25	X' ± 5'						
				.XX ± 0.15	.X' ± 2'						
				.XXX ± 0.05	.XX' ± 1'	日期 2006.01.05 名稱 : Female Header P2.0mm 審核 TITLE Profile : 4.3mm, Single Row, Right Angle Type					
更改 REV.	設 變 內 容 MODIFICATION	修 改 DRAWN	核 准 APPROVED	製 圖	SAM	料號 : SB62-01XX-0XX0 PART NO.					