

Specifications


Current Rating : 2 Amps
 Insulator Resistance : 1000 Megohms min.
 Contact Resistance : 20 m ohms max.
 Dielectric Withstanding : AC 500V
 Operating Temperature : -40°C ~ +105°C
 Contact Material : Phosphor Bronze
 Insulator Material : Polyester, UL 94V-0
 Standard : Nylon
 Contact Plated : Full Gold, Full Tin, Selective Plated

Order Information

Serial No. SB6 1- 0 2 XX - 0 XX 0
 Terminal Type 1 : Straight Type
 Row Type 2 : Dual Rows
 No. of Contact per Row
 Contact Plated

Plating Type
Full Gold Plating
GF : Gold Flash G1 : Gold 3u" G2 : Gold 5u" G3 : Gold 10u" G4 : Gold 15u"

Recommended
 P.C. Board
 Hole Layout

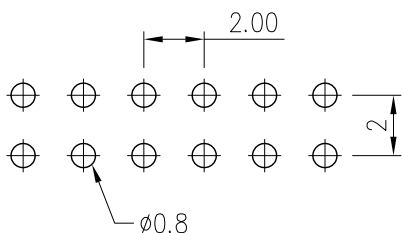

.X±0.10	.X±	單位 : MM	朝富科技股份有限公司 JOIN TEK JOIN TEK CORPORATION CO.,LTD.
.XX±0.05	.XX±	料號 : SB61-02XX-0XX0	
.XXX±0.03	.XXX±	日期 : 2005/09/23	
本藍圖為朝富科技股份有限公司所有. 未經本公司書面許可, 嚴禁印製		審核 :	名稱 : Female Header P2.0mm TITLE : Profile : 4.3mm, Dual Rows, Straight Type
		製圖 : Sam	圖號 : SB61-02XX DWG No.:
ECN 設變	MODIFICATION 設變內容	DRAWN 修改	APPROVED 核准
		SCALE	SHEET 1/1
			REV. A

ECN 設變	MODIFICATION 設變內容	DRAWN 修改	APPROVED 核准
--------	-------------------	----------	-------------