

Specifications


Current Rating : 2 Amps
 Insulator Resistance : 1000 Megohms min.
 Contact Resistance : 20 m ohms max.
 Dielectric Withstanding : AC 500V
 Operating Temperature : -40°C ~ +105°C
 Contact Material : Phosphor Bronze
 Insulator Material : Polyester, UL 94V-0
 Standard : Nylon
 Contact Plated : Full Gold, Full Tin, Selective Plated



Order Information

Serial No. SB1 2- 0 2 XX - X XX 0
 Terminal Type 2 : Right Angle Type
 Row Type 2 : Dual Rows
 No. of Contact per Row
 Terminal Dim. Type 1. A=4.3 ,B=4.5
 Contact Plated

Contact Plating Type		
Full Gold Plating	Duplex Plating Gold Plated On Contact Area Tin Plated On Solder Area	Full Tin Plating
GF : Gold Flash G1 : Gold 3u" G2 : Gold 5u" G3 : Gold 10u" G4 : Gold 15u"	HF : Gold Flash, Tin 100u" H1 : Gold 3u", Tin 100u" H2 : Gold 5u", Tin 100u" H3 : Gold 10u", Tin 100u" H4 : Gold 15u", Tin 100u"	T1 : Tin 100u"

Recommended
P.C. Board
Hole Layout

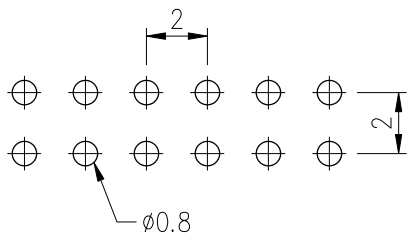

TOLERANCE UNLESS SPECIFIED				 朝富科技股份有限公司 JOIN TEK CORPORATION CO., LTD.	SCALE	SHEET	VER.			
LINEAR		ANGLE								
.X	± 0.25	X°	± 5°					 名稱 : Female Header P2.0mm TITLE Profile : 4.3mm, Dual Rows, Straight Type	1/1	A
.XX	± 0.15	.X°	± 2°							
.XXX	± 0.05	.XX°	± 1°							
日期	2005.09.23			料號 : SB12-02XX-XXX0 PART NO.						
審核										
更改 REV.	設 變 內 容 MODIFICATION	修改 DRAWN	核准 APPROVED	製 圖	SAM					