


Specifications

Current Rating : 2 Amps
 Insulator Resistance : 1000 Megohms min.
 Contact Resistance : 20 m ohms max.
 Dielectric Withstanding : AC 500V
 Operating Temperature : -40°C ~ +105°C
 Max. Processing Temp. : 230°C for 30~60 Seconds
 (260°C for 10 Seconds)

Contact Material : Brass
 Insulator Material : Polyester, UL 94V-0
 Standard : Nylon-6T
 Contact Plated : Full Gold, Full Tin, Selective Plated


Order Information

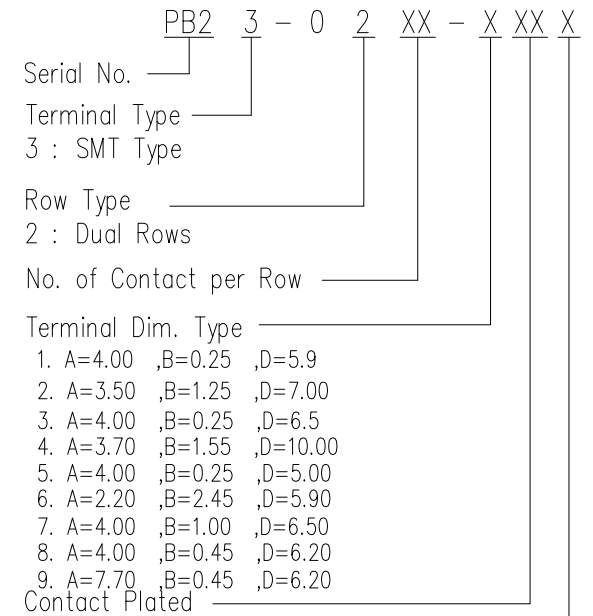

- 1. A=4.00 ,B=0.25 ,D=5.9
- 2. A=3.50 ,B=1.25 ,D=7.00
- 3. A=4.00 ,B=0.25 ,D=6.5
- 4. A=3.70 ,B=1.55 ,D=10.00
- 5. A=4.00 ,B=0.25 ,D=5.00
- 6. A=2.20 ,B=2.45 ,D=5.90
- 7. A=4.00 ,B=1.00 ,D=6.50
- 8. A=4.00 ,B=0.45 ,D=6.20
- 9. A=7.70 ,B=0.45 ,D=6.20

Contact Plated _____
 Packing Type _____
 A. In Tube
 B. W/Cap In Tube
 C. W/Film In Tube
 D. W/Cap In Tape & Reel
 E. W/Film In Tape & Reel

Recommended P.C. Board Layout

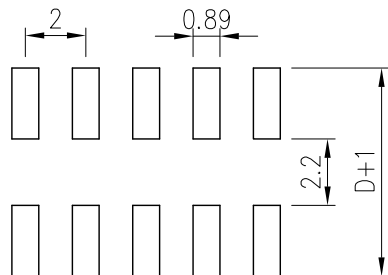

Contact Plating Type		
Full Gold Plating	Duplex Plating Gold Plated On Contact Area Tin Plated On Solder Area	Full Tin Plating
GF : Gold Flash G1 : Gold 3u" G2 : Gold 5u" G3 : Gold 10u" G4 : Gold 15u"	HF : Gold Flash, Tin 100u" H1 : Gold 3u", Tin 100u" H2 : Gold 5u", Tin 100u" H3 : Gold 10u", Tin 100u" H4 : Gold 15u", Tin 100u"	T1 : Tin 100u"

ECN 設變	MODIFICATION 設變內容	DRAWN 修改	APPROVED 核准
-----------	----------------------	-------------	----------------

.X±0.20	.X±	單位 : MM	朝富科技股份有限公司 JOIN TEK JOIN TEK CORPORATION CO.,LTD.
.XX±0.10	.XX±	料號 :	
.XXX±0.05	.XXX±	PB23-02XX-0XX0	
本藍圖為朝富科技股份有限公司所有.未經本公司書面許可,嚴禁印製			名稱 : Pin Header P2.0mm Dual Rows, SMT 圖號 : PB23-02XX-01 DWG No.
		日期 : 2005/11/24	SCALE
		審核 :	SHEET
		製圖 : Sam	REV.
			1/1
			A