


Recommended  
P.C. Board  
Hole Layout

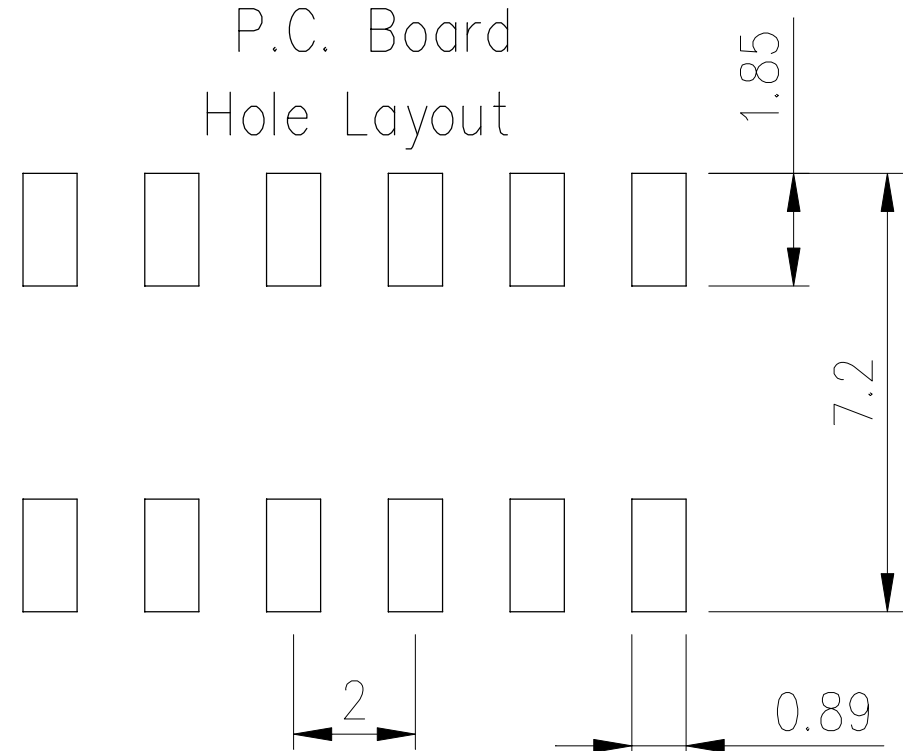

### Specifications


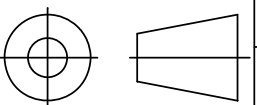
Current Rating : 2 Amps  
 Insulator Resistance : 1000 Megohms min.  
 Contact Resistance : 20 m ohms max.  
 Dielectric Withstanding : AC 500V  
 Operating Temperature : -40°C ~ +105°C  
 Max. Process Temp. : 230°C for 30~60 Seconds  
 (260°C for 10 Seconds)  
 Contact Material : Phosphor Bronze  
 Insulator Material : Polyester, UL 94V-0  
 Standard : Nylon-6T  
 Contact Plated : Full Gold, Full Tin, Selective Plated

### Order Information

Serial No. SB6 3- 0 2 XX - 0 XX X  
 Terminal Type 3 : SMT Type  
 Row Type 2 : Dual Rows  
 No. of Contact per Row  
 Contact Plated  
 Packing List  
 A : In Tube  
 B : W/Cap In Tube  
 C : W/Film In Tube  
 D : W/Cap In Tape & Reel  
 E : W/Film In Tape & Reel

### Contact Plating Type

Full Gold Plating	Duplex Plating Gold Plated On Contact Area Tin Plated On Solder Area	Full Tin Plating
GF : Gold Flash G1 : Gold 3u" G2 : Gold 5u" G3 : Gold 10u" G4 : Gold 15u"	HF : Gold Flash, Tin 100u" H1 : Gold 3u", Tin 100u" H2 : Gold 5u", Tin 100u" H3 : Gold 10u", Tin 100u" H4 : Gold 15u", Tin 100u"	T1 : Tin 100u"

				TOLERANCE UNLESS SPECIFIED		 <b>朝富科技股份有限公司</b> JOIN TEK CORPORATION CO., LTD.
				LINEAR	ANGLE	
				.X ± 0.20	X.* ± 5°	 <b>SCALE</b> <b>SHEET</b> <b>VER.</b> 1/1   A
				.XX ± 0.10	.X* ± 2°	
				.XXX ± 0.05	.XX* ± 1°	
				日期	2005.11.24	<b>名稱 :</b> Female Header P2.0mm <b>TITLE</b> Profile : 4.3mm, Dual Rows, SMT Type
				審核		
更改 REV.	設 變 內 容 MODIFICATION	修改 DRAWN	核准 APPROVED	製 圖	SAM	<b>料號 :</b> SB63-02XX-0XX0 <b>PART NO.</b>