



Recommended  
P.C. Board  
Hole Layout

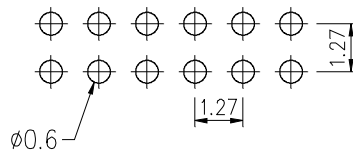

Specifications





- Current Rating : 1 Amps
- Insulator Resistance : 1000 Megohms min.
- Contact Resistance : 20 m ohms max.
- Dielectric Withstanding : AC 300V
- Operating Temperature : -40°C ~ +105°C
- Contact Material : Phosphor Bronze
- Insulator Material : PBT
- Contact Plated : Full Gold, Full Tin, Selective Plated

Order Information

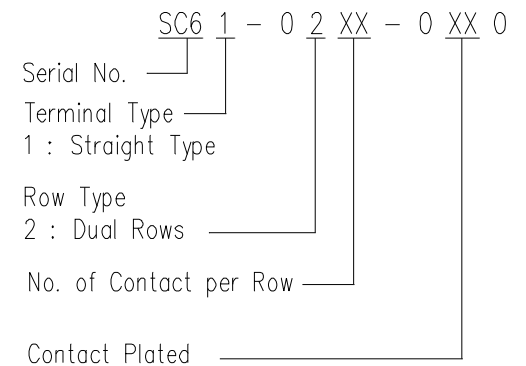

Contact Plating Type		
Full Gold Plating	Duplex Plating Gold Plated On Contact Area Tin Plated On Solder Area	Full Tin Plating
GF : Gold Flash G1 : Gold 3u" G2 : Gold 5u" G3 : Gold 10u" G4 : Gold 15u"	HF : Gold Flash, Tin 100u" H1 : Gold 3u", Tin 100u" H2 : Gold 5u", Tin 100u" H3 : Gold 10u", Tin 100u" H4 : Gold 15u", Tin 100u"	T1 : Tin 100u"

TOLERANCE UNLESS SPECIFIED			
LINEAR		ANGLE	
.X	± 0.25	X.*	± 5'
.XX	± 0.15	.X*	± 2'
.XXX	± 0.05	.XX*	± 1'
日期	2005.11.11		
製圖	SAM		
更改 REV.	設 變 內 容 MODIFICATION	修改 DRAWN	核准 APPROVED

 <b>朝富科技股份有限公司</b> JOIN TEK CORPORATION CO., LTD.		
 <b>SCALE</b>	 <b>SHEET</b>	 <b>VER.</b>
名稱 :	Female Header P1.27X1.27mm	
TITLE :	Profile : 3.4mm, Dual Rows	
料號 :	SC61-02XX-0XX0	
PART NO.		