

Specifications

Current Rating : 1 Amps
 Insulator Resistance : 1000 Megohms min.
 Contact Resistance : 20 m ohms max.
 Dielectric Withstanding : AC 500V
 Operating Temperature : -40°C ~ +105°C
 Max Processing Temp : 230°C for 60 Seconds
 260°C for 5 Seconds

Contact Material : Brass
 Insulator Material : Polyester, UL 94V-0
 Standard :
 Contact Plated : Full Gold Flash


Order Information

PC2 3 - 0 2 XX - X GF X
 Serial No. _____
 Terminal Type _____
 3 : SMT Type
 Row Type _____
 2 : Dual Rows
 No. of Contact per Row _____
 Terminal Dim. Type _____



1. AL=5.50 ,b=1.60 ,c=3.00 ,d=1.10, f=3.4
2. AL=5.90 ,b=1.60 ,c=4.00 ,d=1.10, f=3.4
3. AL=7.90 ,b=1.60 ,c=4.00 ,d=1.10, f=3.4
4. AL=10.30 ,b=1.60 ,c=4.00 ,d=1.10, f=3.4
5. AL=4.47 ,b=2.34 ,c=3.81 ,d=1.60, f=3.0
6. AL=4.50 ,b=2.34 ,c=3.81 ,d=1.60, f=3.0
7. AL=4.50 ,b=1.60 ,c=2.00 ,d=1.10, f=3.4
8. AL=5.50 ,b=2.50 ,c=4.00 ,d=2.00, f=3.0
9. AL=5.50 ,b=1.90 ,c=1.9 ,d=1.50, f=3.4
- A. AL=5.80 ,b=2.90 ,c=3.00 ,d=2.50, f=3.0
- B. AL=5.50 ,b=1.60 ,c=5.70 ,d=1.00, f=3.4
- C. AL=5.50 ,b=2.90 ,c=7.20 ,d=2.00, f=3.0
- D. AL=4.50 ,b=2.20 ,c=5.90 ,d=1.60, f=3.0

Contact Plated _____

- Packing List
- O : In Bag
 - A : In Tube
 - B : W/Cap In Tube
 - C : W/Film In Tube
 - D : W/Cap In Tape & Reel
 - E : W/Film In Tape & Reel

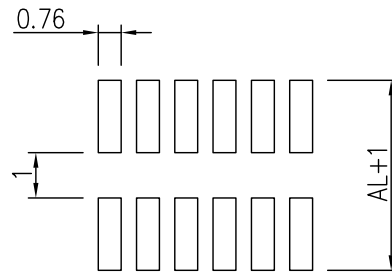

P.C.Board Layout

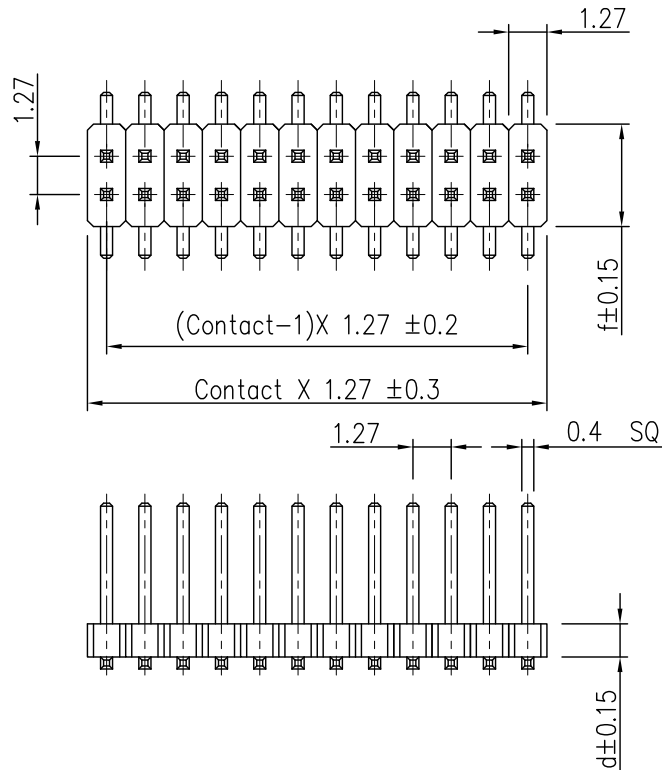

Contact Plating Type		
Full Gold Plating	Duplex Plating Gold Plated On Contact Area Tin Plated On Solder Area	Full Tin Plating
GF : Gold Flash G1 : Gold 3u" G2 : Gold 5u" G3 : Gold 10u" G4 : Gold 15u"	HF : Gold Flash, Tin 100u" H1 : Gold 3u", Tin 100u" H2 : Gold 5u", Tin 100u" H3 : Gold 10u", Tin 100u" H4 : Gold 15u", Tin 100u"	T1 : Tin 100u"

				TOLERANCE UNLESS SPECIFIED	
				LINEAR	ANGLE
				.X ± 0.25	X' ± 5'
				.XX ± 0.15	.X' ± 2'
				.XXX ± 0.05	.XX' ± 1'
				日期	2006.01.19
A1	變更編號9的尺寸			審核	
更改 REV.	說 變 內 容 MODIFICATION	修改 DRAWN	核准 APPROVED	製 圖	SAM

朝富科技股份有限公司
 JOIN TEK CORPORATION CO., LTD.

SCALE SHEET VER.
 1/1 A1

名稱 : Pin Header P1.27mm
 TITLE

料號 : PC23-02XX-XGFX
 PART NO.