
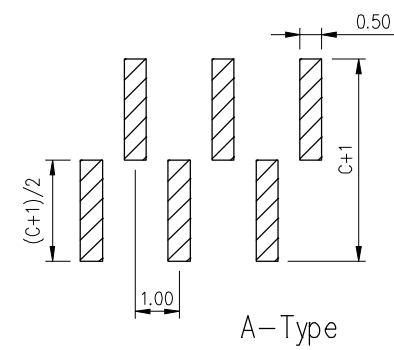
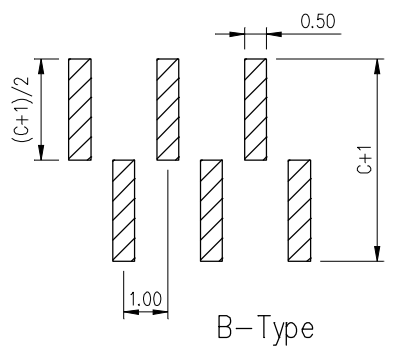

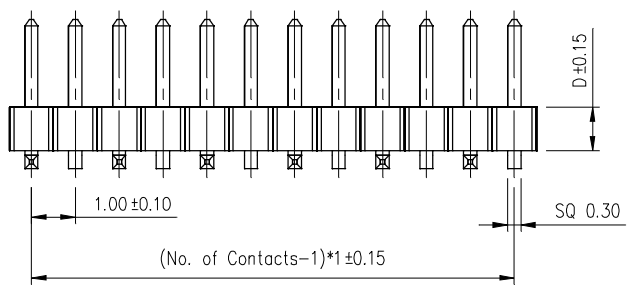
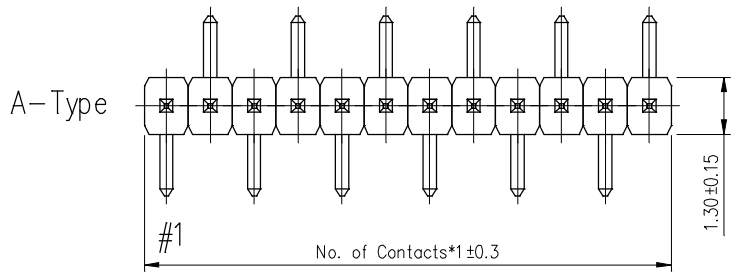


Specifications

Current Rating : 1 Amps
 Insulator Resistance : 1000 Megohms min.
 Contact Resistance : 30 m ohms max.
 Dielectric Withstanding : AC 500V(1 min)
 Operating Temperature : -40°C ~ +85°C
 Contact Material : Brass
 Insulator Material : Polyester, UL 94V-0
 Standard : PA6T
 Contact Plated : Full Gold Flash

Order Information

Serial No. PD3 3 - X 1 XX - X XX X
 Terminal Type 3 : SMT Type
 Layout Type A : A-Type B : B-Type
 Row Type 1 : Single Rows
 No. of Contact per Row
 Terminal Dim. Type
 1. AL=2.00 ,BL=1.40 ,C=4.10 ,D=1.00
 2. AL=0.00 ,BL=0.00 ,C=0.00 ,D=0.00
 Contact Plated
 Packing List A. In Tube B. With Cap In Tube D. With Cap In Tape&Reel

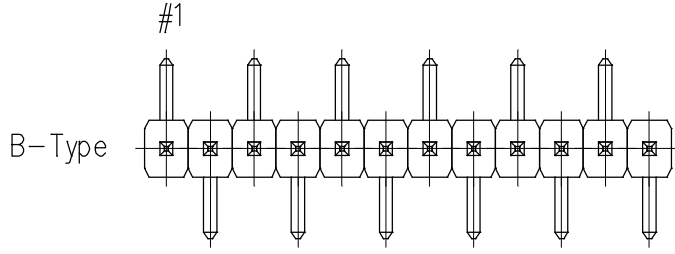

Contact Plating Type		
Full Gold Plating	Duplex Plating Gold Plated On Contact Area Tin Plated On Solder Area	Full Tin Plating
G1 : Gold 3u"	H1 : Gold 3u", Tin 100u"	T1 : Tin 100u"
G2 : Gold 5u"	H2 : Gold 5u", Tin 100u"	
G3 : Gold 10u"	H3 : Gold 10u", Tin 100u"	
G4 : Gold 15u"	H4 : Gold 15u", Tin 100u"	

TOLERANCE UNLESS SPECIFIED		 朝富科技股份有限公司 JOIN TEK CORPORATION CO., LTD.		
LINEAR	ANGLE	SCALE	SHEET	VER.
.X ± 0.30	X' ± 5°		1/1	A
.XX ± 0.20	.X' ± 2°			
.XXX ± 0.10	.XX' ± 1°			
日期	2012.09.28	名稱 : Pin Header P1.0mm TITLE Single Rows, SMT Type		
更改 REV.	股 變 內 容 MODIFICATION	修改 DRAWN	核准 APPROVED	製 圖 JASON
		料號 : PD33-01XX-XXXX PART NO.		