


Recommended
P.C. Board
Hole Layout

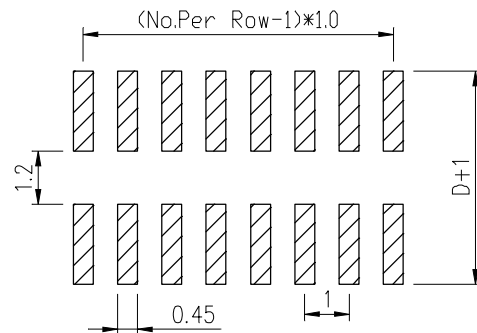

Contact Plating Type		
Full Gold Plating	Duplex Plating Gold Plated On Contact Area Tin Plated On Solder Area	Full Tin Plating
GF : Gold Flash G1 : Gold 3u" G2 : Gold 5u" G3 : Gold 10u" G4 : Gold 15u"	HF : Gold Flash, Tin 100u" H1 : Gold 3u", Tin 100u" H2 : Gold 5u", Tin 100u" H3 : Gold 10u", Tin 100u" H4 : Gold 15u", Tin 100u"	T1 : Tin 100u"

Specifications

Current Rating : 1 Amps
 Insulator Resistance : 1000 Megohms min.
 Contact Resistance : 30 m ohms max.
 Dielectric Withstanding : AC 500V(1 min)
 Operating Temperature : -40°C ~ +85°C
 Contact Material : Brass
 Insulator Material : Polyester, UL 94V-0
 Standard :
 Contact Plated : Full Gold Flash

Order Information

Serial No. PD3 3 - 0 2 XX - X XX X
 Terminal Type 3 : SMT Type
 Row Type 2 : Dual Rows
 No. of Contact per Row
 Terminal Dim. Type
 0. AL=1.4 ,B=2.0 ,C=1.0 ,D=3.8
 1. AL=2.2 ,B=2.0 ,C=1.5 ,D=3.8
 2. AL=1.8 ,B=1.65 ,C=1.5 ,D=5.2
 Contact Plated
 Packing List

A : In Tube
 B : W/Cap In Tube
 C : W/Film In Tube
 D : W/Cap In Tape & Reel
 E : W/Film In Tape & Reel

		TOLERANCE UNLESS SPECIFIED		朝富科技股份有限公司 JOIN TEK CORPORATION CO., LTD.		
		LINEAR	ANGLE	SCALE	SHEET	VER.
		.X ± 0.30	X.* ± 5°		1/1	A
		.XX ± 0.20	.X.* ± 2°			
		.XXX ± 0.10	.XX.* ± 1°			
		日期	2012.09.28	名稱 : Pin Header P1.0mm TITLE : Dual Rows, SMT Type		
		審核		料號 : PD33-02XX-XXX0 PART NO.		
更改 REV.	設 變 內 容 MODIFICATION	修改 DRAWN	核准 APPROVED	製 圖	JASON	