


Recommended  
P.C. Board  
Hole Layout

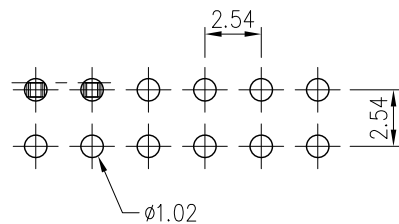


Specifications

Current Rating : 3 Amps  
 Insulator Resistance : 1000 Megohms min.  
 Contact Resistance : 20 m ohms max.  
 Dielectric Withstanding : AC 600V  
 Operating Temperature : -40°C ~ +105°C  
 Contact Material : Brass  
 Insulator Material : Polyester, UL 94V-0

Contact Plated : Full Gold, Full Tin, Selective Plated

Order Information

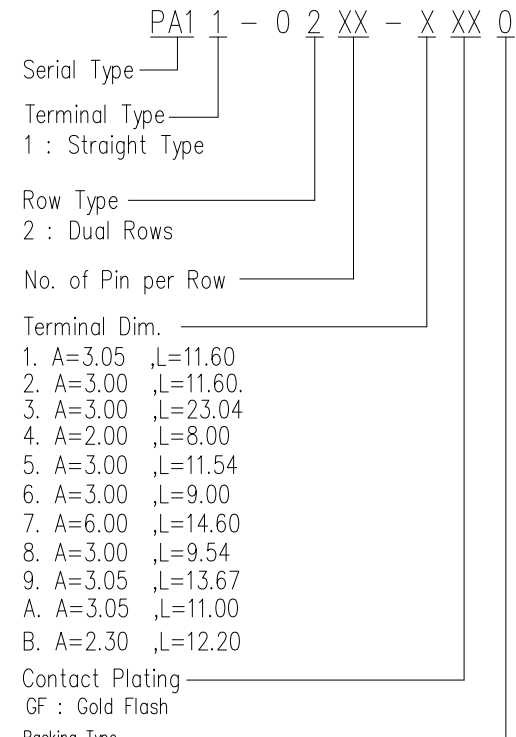

- Terminal Dim.
1. A=3.05 ,L=11.60
  2. A=3.00 ,L=11.60.
  3. A=3.00 ,L=23.04
  4. A=2.00 ,L=8.00
  5. A=3.00 ,L=11.54
  6. A=3.00 ,L=9.00
  7. A=6.00 ,L=14.60
  8. A=3.00 ,L=9.54
  9. A=3.05 ,L=13.67
  - A. A=3.05 ,L=11.00
  - B. A=2.30 ,L=12.20

Contact Plating  
 GF : Gold Flash

Packing Type  
 0: In PE Bag  
 A. In Tube  
 B. W/Cap In Tube  
 C. W/Cap In Tube & Reel

ECN 設變	MODIFICATION 設變內容	DRAWN 修改	APPROVED 核准

.X±0.30	.X±	單位 : MM	<p>朝富科技股份有限公司          JOIN TEK JOIN TEK CORPORATION CO.,LTD.</p>	
.XX±0.20	.XX±	料號 : PA11-02XX-XXX0		
.XXX±0.10	.XXX±	日期 : 2006/01/18		
本藍圖為朝富科技股份有限公司所有,未經本公司書面許可,嚴禁印製			名稱 : Pin Header P2.54mm Dual Rows, Straight Type	
			圖號 : PA11-02XX DWG NO.	
審核 : 製圖 : Sam		SCALE	SHEET	REV.
		1/1	1/1	A