

更改 REV	設變內容 MODIFICATION	修改 DRAWN	核准 APPROVED
-----------	----------------------	-------------	----------------

ORDERING CODE





JF 1 1 - 1 X X - X 2 2 X - X

- FFC\FPC _____
- PITCH 1.0mm _____
- HORIZONTAL _____
- CONTACT TYPE _____
- 1:UPPER CONTACT _____
- NO. OF CONTACTS _____
- 03-30 PIN _____
- HOUSING & ACTUATOR MATERIALS _____
- 5:HOUSING PA-46, ACTUATOR PPS (BLACK)UL 94V-0 _____
- PLATING _____
- 2: GOLD FLASH _____
- 3: Au 3u" _____
- 4: Au 5u" _____
- A: MATTE TIN 100u" MIN, OVER 50u"MIN NI ON CONTACT _____
- PACKING TYPE _____
- 1:TUBE _____
- 2:REEL _____
- HOLDDOWN TYPE _____
- 2:HOLDDOWN TYPE 2. _____
- TAIL LENGTH _____
- 2:TAIL LENGTH 1.05mm. _____


FEATURE AND SPECIFICATIONS

FOR 0.3mm THICKNESS FFC/FPC.
 VOLTAGE: 50V MAX.
 CURRENT: 0.5A MAX.
 CONTACT RESISTANCE: 20 milliohms MAX.
 INSULATION RESISTANCE: 50 Megohms MIN.
 DIELECTRIC WITHSTANDING VOLTAGE: 250V AC.
 TEMPERATURE: -40°C TO 85°C



MATERIAL AND FINISH
 HOUSING: HIGH-TEMP. THERMOPLASTIC. UL 94V-0.
 ACTUATOR: HIGH-TEMP. THERMOPLASTIC. UL 94V-0.
 CONTACT: SEE ORDERING CODE
 HOLDDOWN: BRASS. PLATING: Tin 100u", over Ni 50u"

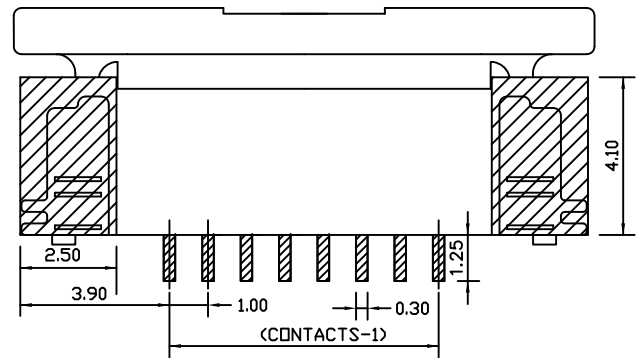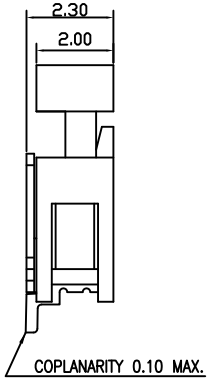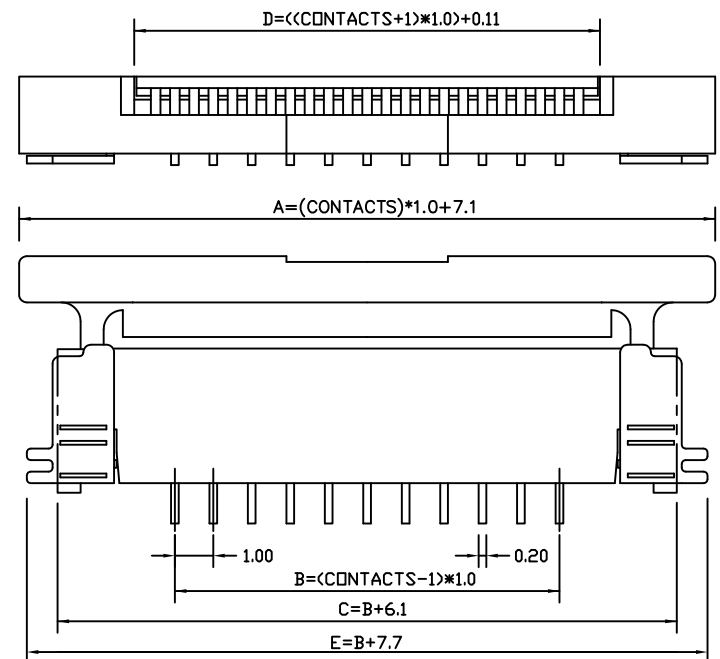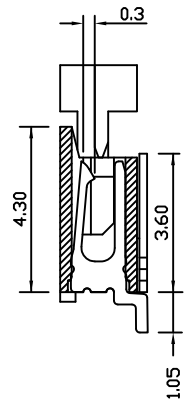

RECOMMENDED PCB LAYOUT

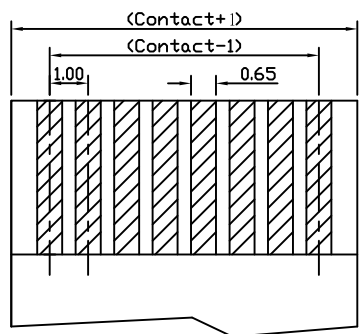

FFC/FPC DIMENSION THICKNESS 0.30 mm

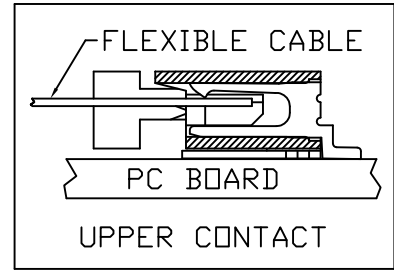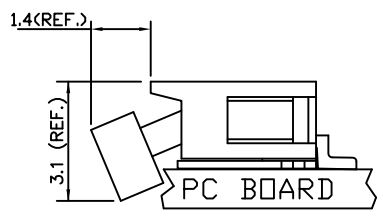

.X±0.20	.X±	單位 MM	料號	朝富科技股份有限公司
.XX±0.15	.XX±	材質	JF11-1XX-X22X-X	
.XXX±0.10	.XXX±	處理		
		數量	日期 2007.03.05	名稱 ZIF FPC 1.0mm SMT TITLE CONN. HORIZONTAL SIDE ENTRY TYPE
		製圖: DANIEL	審核	圖號 DWG NO. JF11-1XX-X22X-X
			製圖: DANIEL	SCALE 5:1
				SHEET 1/2
				REV. A

PIN	A	B	C	D	E
3	10.10	2.00	8.10	4.11	9.70
4	11.10	3.00	9.10	5.11	10.70
5	12.10	4.00	10.10	6.11	11.70
6	13.10	5.00	11.10	7.11	12.70
7	14.10	6.00	12.10	8.11	13.70
8	15.10	7.00	13.10	9.11	14.70
9	16.10	8.00	14.10	10.11	15.70
10	17.10	9.00	15.10	11.11	16.70
11	18.10	10.00	16.10	12.11	17.70
12	19.10	11.00	17.10	13.11	18.70
13	20.10	12.00	18.10	14.11	19.70
14	21.10	13.00	19.10	15.11	20.70
15	22.10	14.00	20.10	16.11	21.70
16	23.10	15.00	21.10	17.11	22.70
17	24.10	16.00	22.10	18.11	23.70
18	25.10	17.00	23.10	19.11	24.70
19	26.10	18.00	24.10	20.11	25.70
20	27.10	19.00	25.10	21.11	26.70
21	28.10	20.00	26.10	22.11	27.70
22	29.10	21.00	27.10	23.11	28.70
23	30.10	22.00	28.10	24.11	29.70
24	31.10	23.00	29.10	25.11	30.70
25	32.10	24.00	30.10	26.11	31.70
26	33.10	25.00	31.10	27.11	32.70
27	34.10	26.00	32.10	28.11	33.70
28	35.10	27.00	33.10	29.11	34.70
29	36.10	28.00	34.10	30.11	35.70
30	37.10	29.00	35.10	31.11	36.70

.X±0.20	.X±	單位 MM	料號	朝富科技股份有限公司		
.XX±0.15	.XX±	材質	JF11-1XX-X22X-X	名稱 ZIF FPC 1.0mm SMT TITLE CONN. HORIZONTAL TOP CONTACT TYPE		
.XXX±0.10	.XXX±	處理	日期 2007.03.05	圖號 DWG NO. JF11-1XX-X22X-X		
		數量	審核	SCALE	SHEET	REV.
			製圖: GAVIN		2/2	A