

规格说明:Specifications:

电气特性:Electrical:

1. 额定电流: Current Rating
1.5A/contact terminal
2. 额定电压: Voltage Rating
30V DC
3. 接触阻抗: Contact Resistance
30 milliohms MAX
4. 耐电压: Dielectric Withstanding Voltage:
500 V AC AT Sea Level
5. 绝缘阻抗: Insulation Resistance:
1000MΩ ohms MIN

物理性能:Mechanical:

1. 插拔力: Connector Mate and Unmate Force
Mate force: 3.75kgf (MAX)
Unmate force: 1.02kgf (MIN)
2. 端子保持力: Terminal Retention
1.2kgf (MIN)


原材料:Material:

1. 塑胶: Housing:
Hing Temperature Thermoplastics,
UL 94V-0

2. 端子: Contact: Copper Alloy C2680
3. 外壳: Shell: Copper Alloy C2680/Spcc

电镀:Finish:

1. 端子: Contact: Plated Gold in Mating Area;
Tin On Solder Talls
2. 外壳: Shell:
Nickel Plating

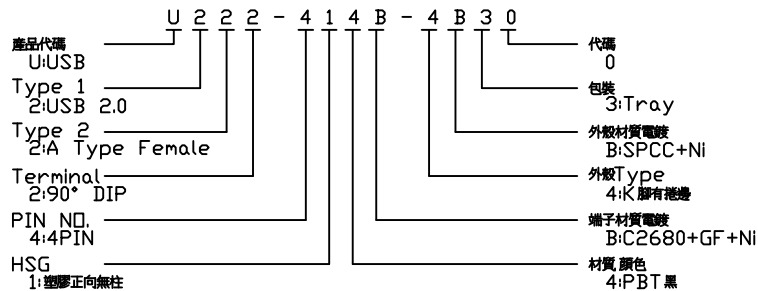

		TOLERANCE UNLESS SPECIFIED	
		LINEAR	ANGLE
		.X ± 0.30	X' ± 5'
		.XX ± 0.20	.X' ± 2'
		.XXX ± 0.10	.XX' ± 1'
日期	2015.04.20		
審核			
更改 REV.	設變內容 MODIFICATION	修改 DRAWN	核准 APPROVED
		製圖	JASON

朝富科技股份有限公司
JOIN TEK JOIN TEK CORPORATION CO., LTD.

SCALE	SHEET	VER.
	1/1	A

名稱: USB A/F 90° DIP K腳有捲邊
TITLE

料號: U22-414B-4B30
PART NO.